В

 $\rightarrow$ 

Ø.120 [Ø3.05] Ø.092 [Ø2.34] Ø.092 [Ø2.34] Ø.092 [Ø2.34] Ø.092 [Ø2.34] Ø.092 [Ø2.34]

O-RING-

77

O-RING

BODY

2

-LOCK WASHER

LOCK WASHER

NOTES:


1. SPECIFICATIONS PER IDS-22J.

4

2. CONTACT, JAM NUT, LOCK WASHER, AND O-RING SHIPPED LOOSE.

3. ACCOMMODATES RG-405 (.086 SEMI-RIGID) OR EQUIVALENT FLEXIBLE CABLE.

4. MAGNETISM: < 1.00000 mu.

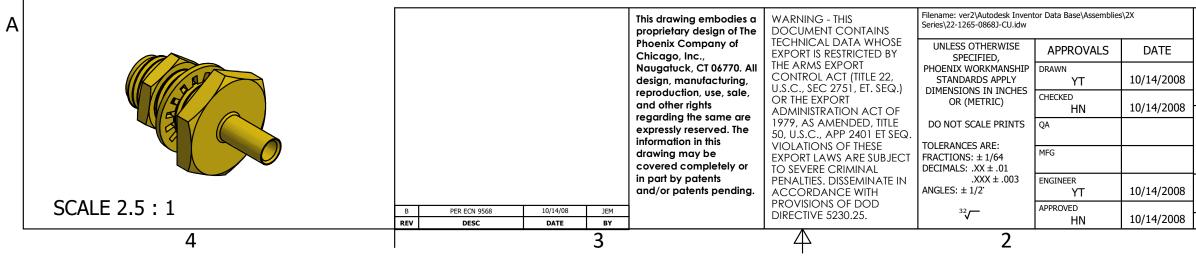

3

CONTACT

