



4 | 3 | 2 | 1

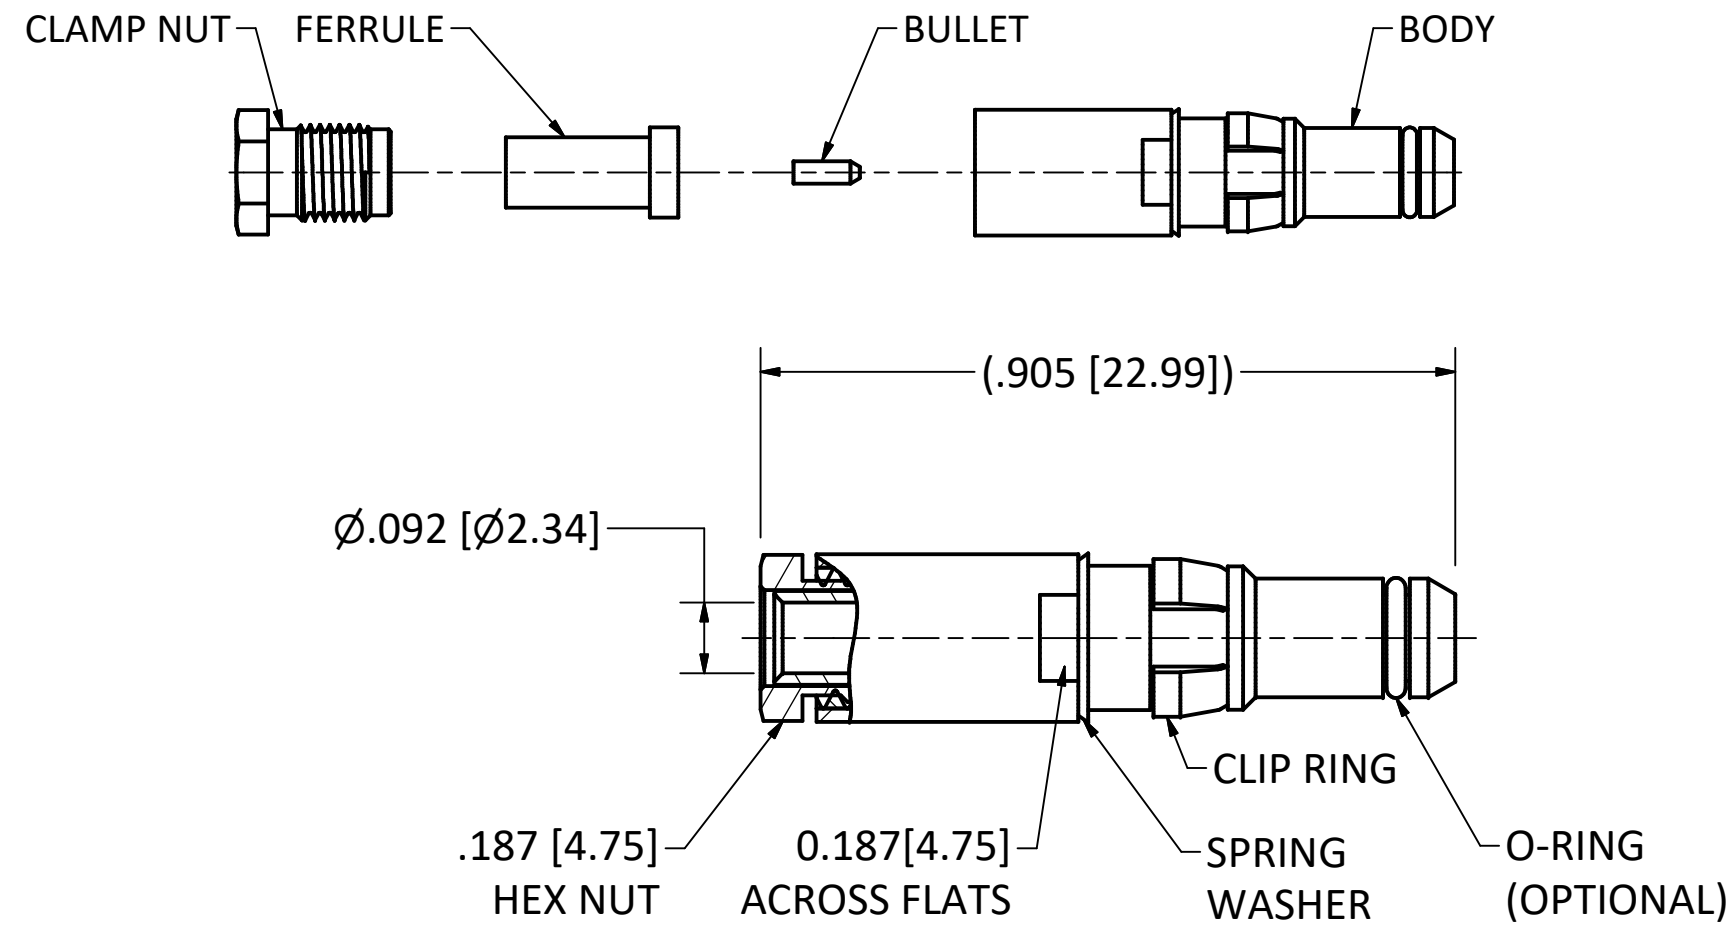

NOTES:  
 1. SPECIFICATIONS PER IDS-26.  
 2. CLAMP NUT, FERRULE, AND BULLET SHIPPED LOOSE.  
 3. ACCOMMODATES RG-405 (.086 SEMI-RIGID) OR EQUIVALENT FLEXIBLE CABLE.  
**HOUSING:** DIN 41612, SIZE 8 CAVITY.

PART NUMBER	O-RING OPTIONS
26D-0030-0860	NONE
26D-0031-0860	ENVIRONMENTAL
26D-0033-0860	EMI SPRING
26D-0035-0860	GROUNDING RING

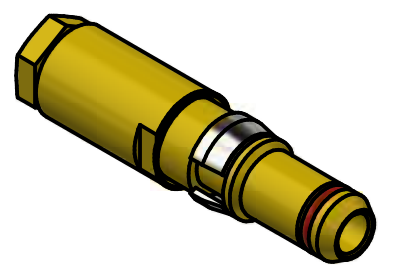

SCALE 2.5 : 1

REV	DESCRIPTION	DATE	BY
G	ECN 13810	7/9/20	JEM
F	ECN 10999	6/11/11	JEM
E	PER ECN 10696	11/10/10	JEM
D	ECN 10101	12/3/09	JEM
C	ECN 7556	7/27/04	JEM
B	ECN 3380	4/22/96	HN

This drawing embodies a proprietary design of The Phoenix Company of Chicago, Inc., Naugatuck, CT 06770. All design, manufacturing, reproduction, use, sale, and other rights regarding the same are expressly reserved. The information in this drawing may be covered completely or in part by patents and/or patents pending.

WARNING - THIS DOCUMENT CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751, ET. SEQ.) OR THE EXPORT ADMINISTRATION ACT OF 1979, AS AMENDED, TITLE 50, U.S.C., APP 2401 ET SEQ. VIOLATIONS OF THESE EXPORT LAWS ARE SUBJECT TO SEVERE CRIMINAL PENALTIES. DISSEMINATE IN ACCORDANCE WITH PROVISIONS OF DOD DIRECTIVE 5230.25.

Filename: ver2\Autodesk Inventor Data Base\Assemblies\26 Series\26D-003X-0860-CU.idw		
UNLESS OTHERWISE SPECIFIED, PHOENIX WORKMANSHIP STANDARDS APPLY DIMENSIONS IN INCHES OR (METRIC)  DO NOT SCALE PRINTS  TOLERANCES ARE: FRACTIONS: ± 1/64 DECIMALS: .XX ± .01 .XXX ± .003 ANGLES: ± 1/2°	APPROVALS	DATE
	DRAWN MY	11/10/1995
	CHECKED HN	11/10/1995
	QA	
	MFG	
	ENGINEER MS	11/10/1995
APPROVED JEM	11/10/1995	

**The PHOENIX Company of Chicago, Inc.**  
 22 GREAT HILL RD., NAUGATUCK, CT 06770  
 WWW.PHOENIXOFCHICAGO.COM  
 PHONE: (800) 323-9562 FAX:(630) 206-1801

TITLE  
**PKZ® PLUG, SOLDER/CLAMP TERMINATION**

SIZE <b>B</b>	FSCM 58167	DWG NO <b>26D-003X-0860</b>	REV G	PLATING OPT. A, B, C, D
SCALE 2.5 : 1		F.S.R. #	SHEET 1 OF 1	

4 | 3 | 2 | 1