

# PRX CONNECTORS

High Density Microwave  
for PXIe



## FEATURES

- 26-Pin Configuration
- Backshell-Free Design
- Easy Jacking Engagement/Disengagement
- Enhanced Contact Stability
- Size-16 PkZ® Contacts Pre-Cabled
- 300 MHz to 67 GHz
- Variety of 50 Ohm Cables
- Constant Impedance over a Broad Axial Mating Tolerance
- Single or Two Stacked Connectors in a Single PXI Slot

## APPLICATIONS

- PXIe Instrument Modules
- Test & Measurement
- Broadcast
- Medical
- Military

## SPECIFICATIONS

### MATERIALS AND FINISHES

#### HOUSINGS

- Housing: Acetal, Black
- Hardware: Stainless Steel, Passivated
- Guide Pins: Stainless Steel, Passivated

#### PKZ CONTACTS

- Bodies: Brass Per ASTM B16, Gold Over Nickel
- Contacts: Beryllium Copper Per ASTM B196  
Or Brass Per ASTM B16, Gold Over Nickel
- Insulators: Virgin Teflon (PTFE) Per ASTM D1710

### ELECTRICAL

#### HOUSINGS

- Dielectric: 1,000 Volts RMS at Sea Level

#### PKZ CONTACTS

- Impedance: 50 Ohms
- Frequency: Up to 67 GHz
- Axial Mating: .050"
- Cable Groups: 1.37mm, RG-178, 316, 405, .047", Custom




Leading Blindmate Microwave Contact Technology


[www.phoenixofchicago.com](http://www.phoenixofchicago.com)

# PRX CONNECTORS


## PRX PLUG HOUSING

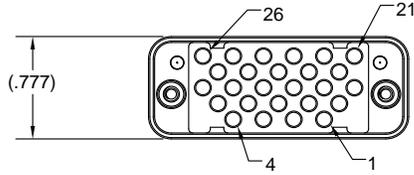


PART NUMBER: PRX26PDX2XA0000

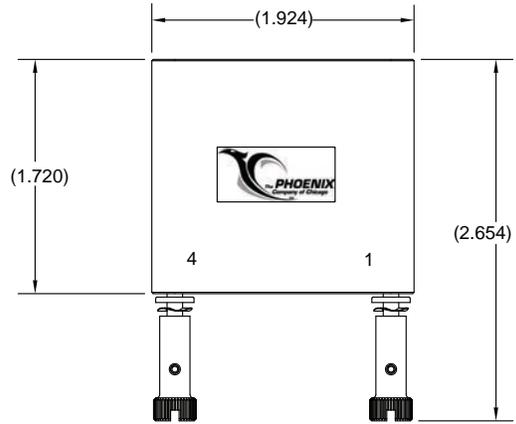

## PRX RECEPTACLE HOUSING



PART NUMBER: PRX26RDX2XA0000

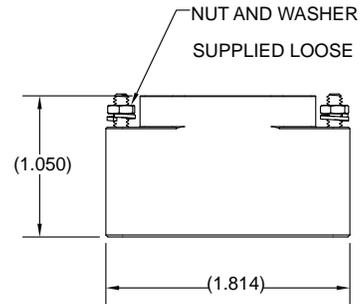

LEARN MORE

