



- SPECIFICATIONS:
1. PART NUMBER: PX12HPDX0XA0000.
 2. MATERIALS:
 - a) HOUSING: ACETAL, COLOR: BLACK.
 - b) HOUSING HARDWARE: STAINLESS STEEL.
 - c) GUIDE PINS: STAINLESS STEEL.
 3. HARDWARE FINISHES: PASSIVATED.
GUIDE PINS: PASSIVATED.
 4. ELECTRICAL PROPERTIES:
 - a) DIELECTRIC STRENGTH: 1,000 VOLTS RMS AT SEA LEVEL;
325 VOLTS RMS AT 70,000 FEET.
 - b) INSULATION RESISTANCE: 1 MEGOHM MINIMUM.
 5. ENVIRONMENTAL PROPERTIES:
OPERATING TEMPERATURE: -40° F TO +194° F (-40° C TO +90° C).
 6. A CABLE GUIDE PLATE (ORDERED SEPARATELY) MUST BE USED
FOR PROPER CABLE MANAGEMENT AND MATING.

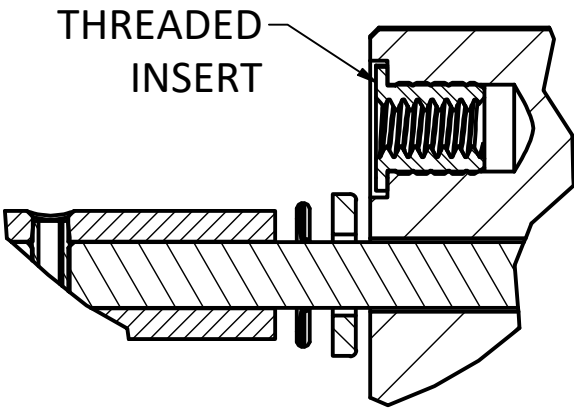

DETAIL B
SCALE 3 : 1

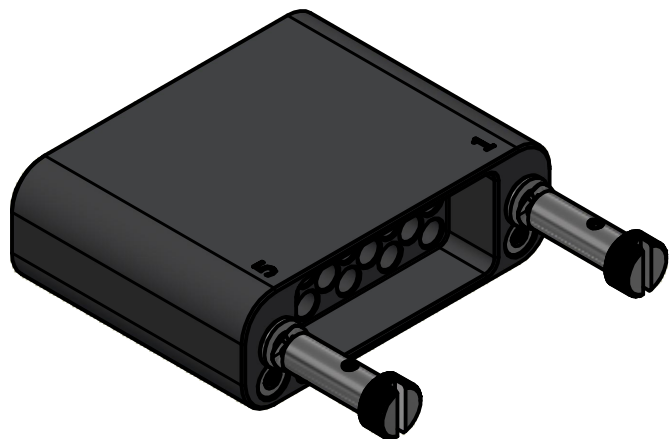

				WARNING - THIS DOCUMENT CONTAINS TECHNICAL DATA WHOSE EXPORT IS RESTRICTED BY THE ARMS EXPORT CONTROL ACT (TITLE 22, U.S.C., SEC 2751, ET. SEQ.) OR THE EXPORT ADMINISTRATION ACT OF 1979, AS AMENDED, TITLE 50, U.S.C., APP 2401 ET SEQ. VIOLATIONS OF THESE EXPORT LAWS ARE SUBJECT TO SEVERE CRIMINAL PENALTIES. DISSEMINATE IN ACCORDANCE WITH PROVISIONS OF DOD DIRECTIVE 5230.25.			The PHOENIX Company of Chicago, Inc. 22 GREAT HILL RD., NAUGATUCK, CT 06770 WWW.PHOENIXOFCHICAGO.COM PHONE: (800) 323-9562 FAX:(630) 206-1801		
				UNLESS OTHERWISE SPECIFIED, PALCO WORKMANSHIP STANDARDS APPLY DIMENSIONS IN INCHES OR [METRIC] DO NOT SCALE PRINTS TOLERANCES ARE: FRACTIONS: ± 1/64 DECIMALS: .XX ± .01 ANGLES: ± 1/2° 32			TITLE PX 23-POS, PLUG HOUSING FOR SIZE 12 CONTACTS		
				APPROVALS DRAWN BP 3/5/2025 CHECKED AH 3/18/2025 QA JB 3/18/2025 MFG VL 3/18/2025 ENGINEER DW 3/18/2025 APPROVED AH 3/18/2025			SIZE C FSCM 58167 DWG NO PX12HPDX0XA0000 REV A PLATING OPT.		
A REV. DESCRIPTION DATE APPROVAL				SCALE 1.5 : 1 F.S.R. # SHEET 1 OF 1					