
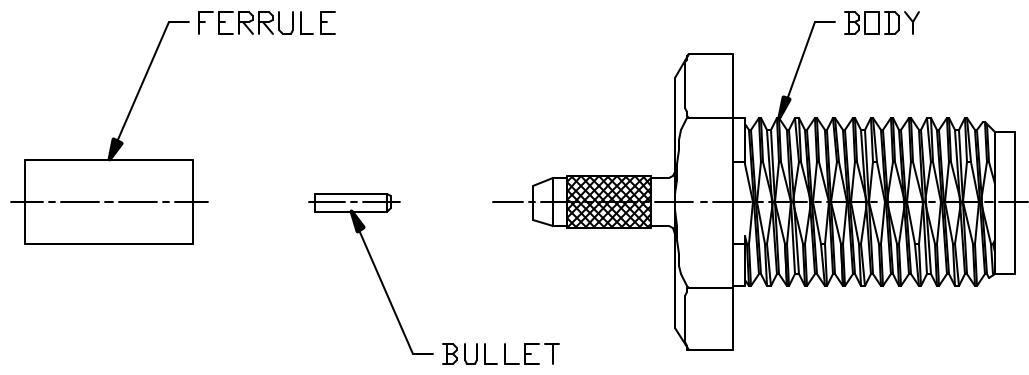
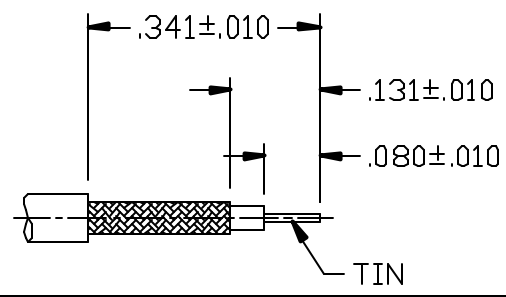


				PALCO CONNECTOR 22 GREAT HILL RD., NAUGATUCK, CT 06770 UNLESS OTHERWISE SPECIFIED, PALCO WORKMANSHIP STANDARDS APPLY TOLERANCES ON: DECIMALS: XX $\pm .01$.XXX $\pm .005$ ANGLES $\pm 1/2^\circ$ 32' DIMENSIONS IN INCHES OR (METRIC) DO NOT SCALE PRINTS	DRAWN JEM	CHECKED MS	ENGINEER JEM	APPROVED MS	FSCM 58167
						DESCRIPTION SMA WATERPROOF REAR MOUNT BULKHEAD JACK			
A	PER ECN 11453	09/20/12	JEM		DATE 09/10/12	DRAWING NO. 22-1965-0498	PLATING OPT. N		
REV.	DESCRIPTION	DATE	APPR.		CATALOG ITEM				


CABLE ASSEMBLY PROCEDURE		 22 GREAT HILL ROAD, NAUGATUCK, CT. 06770 PHONE: (203) 729-9090 FAX: (203) 723-1794	REV	DESCRIPTION	DATE	APPR
P/N	22-1965-0498		01	PRELIMINARY	9/10/12	JEM
PAGE 1 OF 1	DATE: 9/10/11		A	PER ECN 11453	9/20/12	JEM
DRAWN: JEM	APPROVED: JEM					
FOR USE WITH RG-178 CABLE						



STEP 1
 TRIM CABLE TO DIMENSIONS SHOWN. TIN CENTER CONDUCTOR. CLEAN.




STEP 2.
 SOLDER BULLET TO CENTER CONDUCTOR AS SHOWN.

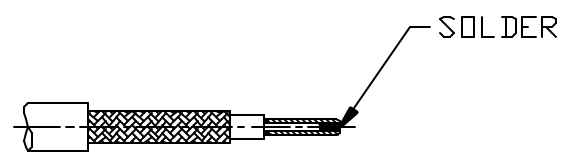

STEP 3
 SLIDE FERRULE ONTO CABLE. FLARE BRAID BY ROTATING CABLE DIELECTRIC.



STEP 4
 INSERT CABLE INTO BODY UNTIL CABLE BOTTOMS. SLIDE FERRULE UP UNTIL IT BOTTOM ON SHOULDER. CRIMP USING .105 HEX DIE (M22520/5-03).

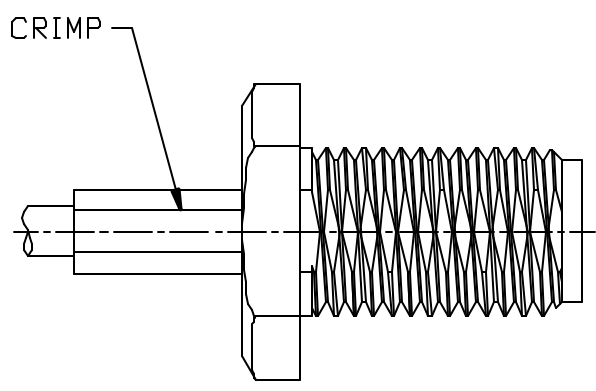

INTERFACE DESIGN STANDARD		 22 GREAT HILL ROAD, NAUGATUCK, CT. 06770 PHONE: (203) 729-9090 FAX: (203) 723-1794	REV	DESCRIPTION	DATE	APPR
IDS-22			D	PER ECN 5828	02/12/01	HN
PAGE 1 OF 2	DATE: 03/05/97		E	PER ECN 6802	11/07/02	HN
DRAWN: JEM	APPROVED: HN		F	PER ECN 7036	03/31/03	HN
		G	PER ECN 8609	08/02/06	JEM	

DESCRIPTION: SMA 22 SERIES (BRASS)

MECHANICAL

MATERIALS

BODIES, NUTS- BRASS 1/2 HD, PER ASTM-B-16, ALLOY 36000.
INSULATORS - TEFLON (PTFE) PER ASTM-D-1457.
CONTACTS, MALE AND FEMALE- BERYLLIUM COPPER PER ASTM-B-196.
GASKETS - SILICONE RUBBER PER ZZ-R-765.

FINISHES (ADD LETTER TO END OF PART NUMBER)

CONTACTS - .00005 GOLD OVER .00005 NICKEL PER MIL-G-45204
TO MEET THE ENVIRONMENTAL REQUIREMENTS OF MIL-C-39012.
OTHER METAL PARTS - .000020 GOLD PLATED
TO MEET THE ENVIRONMENTAL REQUIREMENTS OF MIL-C-39012.

MATING CHARACTERISTICS

CENTER CONTACT PIN AND SOCKET PER MIL-C-39012 (1 OZ. MIN) (2 LBS. MAX)
FORCE TO ENGAGE /DISENGAGE- 2 IN.-LBS. MAX. TORQUE.
COUPLING NUT RETENTION - 60 LBS. MIN.
CONNECTOR DURABILITY - 100 CYCLES PER MIL-PRF-39012.

	WALL THICKNESS OF BODY	
	THICK	THIN
COUPLING PROOF TORQUE, IN.-LBS	15 MIN.	7-10
RECOMMENDED TORQUE, IN.-LBS.	7-10	5-6.5

ELECTRICALS

IMPEDANCE: 50 OHMS.
FREQUENCY RANGE: DC TO 18 GHz.
INSULATION RESISTANCE: 5000 MEGOHMS.
TEMPERATURE RATING: -65°C TO +165°C

	<u>RG 402 (141)</u> <u>SEMI-RIGID</u>	<u>RG 405 (085)</u> <u>SEMI-RIGID</u>
DWV -	1,500 VOLTS RMS.	1,000 VOLTS RMS.
RF HIGH POTENTIAL -	1,000 VOLTS RMS.	670 VOLTS RMS.
CONTACT RESISTANCE -		
CENTER CONTACT:	2.0 MILLIOHMS MAX.	2.0 MILLIOHMS MAX.
OUTER CONTACT:	2.0 MILLIOHMS MAX.	2.0 MILLIOHMS MAX.
OUTER CONTACT TO CABLE:	0.5 MILLIOHMS MAX.	0.5 MILLIOHMS MAX.
VSWR -		
DC - 18.0 GHz:	1.05 + .005F (GHz)	1.05 + .005F (GHz)
CORONA LEVEL -	375 VOLTS MIN.	335 VOLTS MIN.
R.F. LEAKAGE -	-90 dB MIN.	-90 dB MIN.
INSERTION LOSS -	.03 x \sqrt{F} (GHz)	.03 x \sqrt{F} (GHz)

ENVIRONMENTAL

VIBRATION: MIL-STD-202, METHOD 204, TEST CONDITION D.
SHOCK: MIL-STD-202, METHOD 213, TEST CONDITION I.
THERMAL SHOCK: MIL-STD-202, METHOD 107, TEST CONDITION B.
CORROSION: MIL-STD-202, METHOD 101, TEST CONDITION B, 5% SALT SOLUTION.
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106, OMIT STEP 7B.

REV	DESCRIPTION	DATE	APPR
D	PER ECN 5828	02/12/01	HN
E	PER ECN 6802	11/07/02	HN
F	PER ECN 7036	03/31/03	HN
G	PER ECN 8609	08/02/06	JEM

DESCRIPTION: SMA 22 SERIES (BRASS)

